



AUTOMATIC SCRUBBERS - WALK BEHIND



CT45

The CT45 and CT46 offer an innovative design that ensures maximum productivity in a compact scrubber. Their uniquely designed handles are easy to use and allow the machines to be highly maneuverable while their ergonomic designs allow the operator to adjust the height accordingly.

MAX PRODUCTIVITY

17,000 ft²/h

BATTERIES RUNNING TIME

2.0

KEY SPECS

11/12 gal

20" brush drive

MOST FREQUENT USE

RETAIL



HOSPITALITY



CLEANING CONTRACTORS



EDUCATION



FOLDABLE HANDLE



SPIN-ON, SPIN-OFF BRUSH



EASY TO USE CONTROLS



INNOVATIONS



ECO
SELECT



SLS™
SELF
LEVELING
SYSTEM




ECO SELECT

Eco Select permits to decrease energy consumption and increase running time by 20% in every day cleaning operations. Noise level is down to 62Db allowing cleaning operations even in sensitive areas. Programmed maintenance is longer with consequent cost reduction.



Maintenance
Costs

SAVE UP TO
20%

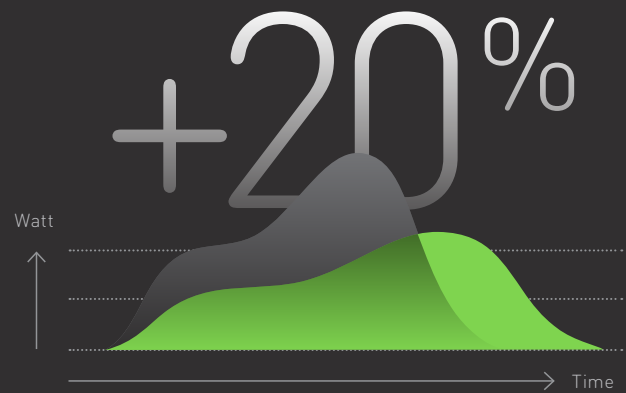

SLS™ SELF LEVELING SYSTEM

MECHANICAL SYSTEM



- The brush pressure with self-leveling and self-adjusting head allows a perfect fit between the brush and floor
- System available as mechanical, electro mechanical or electronic according to machine models



FOLDABLE HANDLE

The adjustable multi-position handle on CT45 allows many applications with maximum comfort to the operator, even in narrow areas.



Handle
Adjustment
Angle

180°



CT45



Other Features

- Brush replacement without tools
- Squeegee blades can be used on four sides before needing replacements
- Easy access to internal compartments
- Tanks and surrounding body in high density polyethylene
- Oil bath reduction gear box
- Brush head and squeegee system designed to absorb harsh impact
- Panel control switches protected against water and humidity
- Central Flow System
- Great maneuverability due to optimum weight distribution

CT45 TECHNICAL SPECIFICATIONS

CT45 BRUSH DRIVE

Code		CT45
PRODUCTIVITY		
Max theoretical productivity	ft²/h - m²	17,000/ 1,750 m²
Cleaning path	in/mm	24 in/ 600 mm
Squeegee width	in/mm	20 in/ 500 mm
Water tank capacity	Gal/ l	11/12 gal/ 40/45 l
Max running time	min	120
Voltage	V-Ah	24V (2x12) AGM
Installed power	W	550
Max Speed		2.2 mph/ 3.5 kph
Brush pressure	lbs/ kg	55 lbs/ 25 kg
Weight	lbs/ kg	243 lb/ 110 kg
Dimensions	in	33 x 22 x 48 in

AVAILABLE ACCESSORIES

PAD DRIVER SPPV01335




SOFT NYLON BRUSH SPPV01332



TYNEX BRUSH SPPV01492



SOFT NATURAL BRISTLE BRUSH SPPV01495



12 V 84 AGM 12V84-AGM



SQUEEGEES PMVR01534 (COMPLETE) MPVR06287 (FRONT) MPVR06288 (REAR)



GET RIGHT SIZED

	Description	Continuous run-time	Theoretical ft ² / h	Maximum Theoretical ft ² /h	Ft ² charge efficiency (70%)
CT45B50	Brush drive, 12v84 AGM Battery	2.0 h	16,811	33,623	23,536



IPC Eagle Corporation
 3650 Dodd Road Eagan, MN 55123
 800-486-2775
info@ipceagle.com