


Sawcut: Refer to the joint sealant manufacturer's product data sheet for the recommended width and depth.

Flexible joint sealant

Everlast Pro Floor 1/8" to 3/8" thickness typical

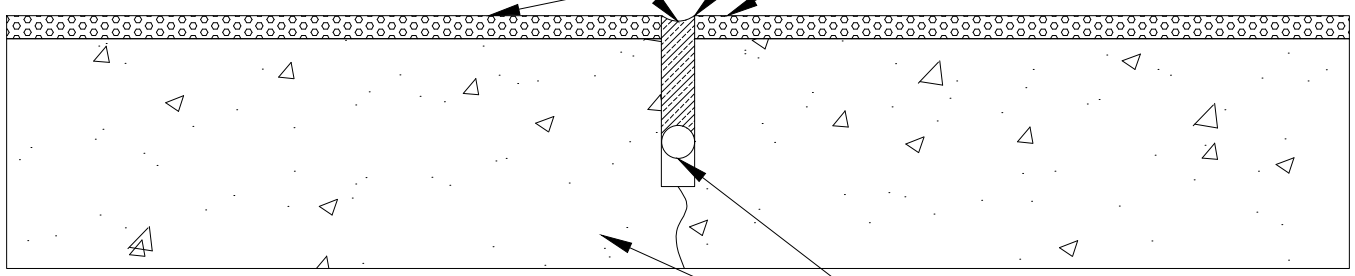

Backer Rod

Substrate: Concrete Typical

ARCHITECTURAL DETAIL

Everlast Pro Floor Non-Moving Control Joint detail

EVERLAST[®]
EPOXY
Healthy ● Durable ● Attractive

803 S Garden St, Columbia, TN 38401
Phone: (800) 708-9870
Email: care@everlastepoxy.com
www.everlastepoxy.com

SCALE
Not to Scale

DATE
2025.05.29

DRAWING NUMBER
EP-MN-Joint-01